



LevelOne

WAB-5120

300Mbps Wireless Outdoor PoE Access Point/Bridge

Quick Installation Guide

English

Deutsch

Table of Content

English	- 3 -
Deutsch	- 9 -

This guide covers only the most common situations. All detailed information is described in the user manual.

English

Hardware Installation

1. Loosen the screw with a screwdriver.
Grab the cover and pull it back harder to take it out



2. Plug Cat.5/5e/6 cable into the RJ-45 LAN1 port. Do not use the RJ45 LAN2 port.



3. Power on the CPE by press the black PWR button beside the LAN 1 Ethernet port.



4. Attach and fasten the removable cover to the bottom of the unit with the screw



5. Plug the power cord into the DC port of the PoE injector



6. Plug the other side of the Cat.5/5e/6 cable into the PoE port of the PoE injector. The installation is finished and looks like the following picture.



Configuration

Check Your Network Settings to login web UI


You need to assign your PC a Static IP address so the WAB-5120 can communicate with your PC during configuration.

Select "Control Panel" > "Network Connections".

Right click the "Local Area Connection" and choose "Properties".

Select the TCP/IP protocol for your network card.

Click on the Properties button. You should then see the following screen.

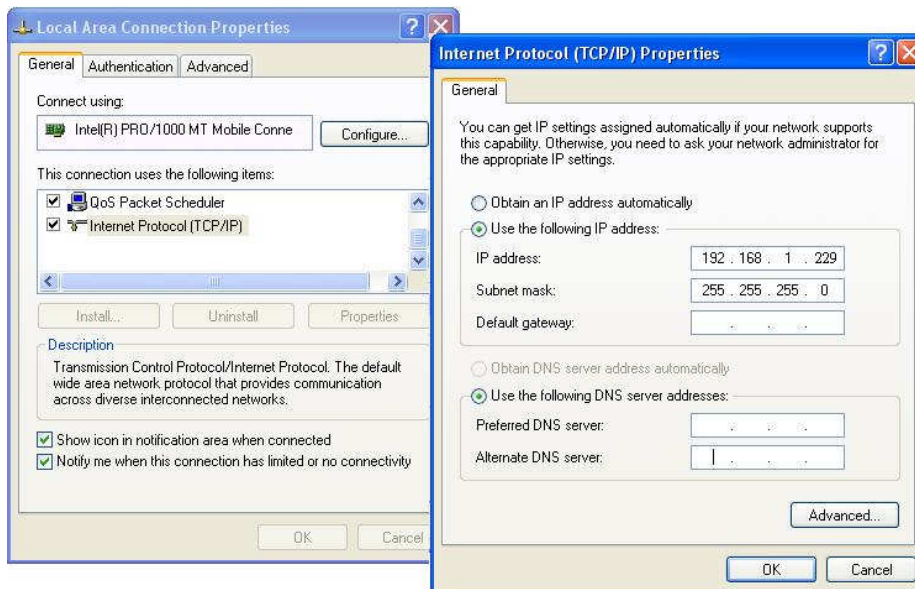

Click on "Use the following IP address" and enter the following IP address and subnet mask.

IP address: **192.168.1.229** Subnet mask: **255.255.255.0**

Click "OK".

Open your Web browser (Internet Explorer is recommended).

Then enter: **http://192.168.1.1**



You will see WAB-5120 Login page as following picture

Use the following username and password to login the device.

User name: **admin** Password: **admin**



Name

Password

AP Mode

1. Choose **Wireless > Basic Settings** for the wireless basic settings.
Click **Apply**.

The screenshot shows the configuration interface for a WAB-5120 300Mbps 5G Wireless Outdoor PoE Access Point/Bridge. The page is titled "Wireless Basic Settings" and includes a sidebar with navigation options: Basic Settings, Profile Settings, Advanced Settings, Access Control, and WDS Settings. The main content area contains the following settings:

- Disable Wireless LAN Interface
- Wireless Mode: AP (dropdown menu)
- Wireless Network Name (SSID): LevelOne (text input)
- Broadcast SSID: Enabled Disabled
- 802.11 Mode: 802.11A/N (dropdown menu)
- HT protect: Enabled Disabled
- Frequency/Channel: 5745MHz (149) (dropdown menu)
- Extension Channel: None (dropdown menu)
- Channel Mode: 20 MHz (dropdown menu)
- Antenna: Internal (16 dBi) SMA Connector
- Maximum Output Power (per chain): 21 dBm (slider and text input)
- Data Rate: Auto (dropdown menu)


- If security is required, open **Wireless > Profile Setting** and enter “**VAP Profile 1 Settings**” as below. Choose **Network Authentication** to change the security settings. Click **Apply**.

The screenshot shows the configuration interface for a WAB-5120 300Mbps 5G Wireless Outdoor PoE Access Point/Bridge. The page is titled "VAP Profile1 Settings" and includes a sidebar with navigation options: Basic Settings, Profile Settings, Advanced Settings, Access Control, and WDS Settings. The main content area contains the following settings:

- Basic Settings**
 - Profile Name: Profile1 (text input)
 - Wireless Network Name (SSID): LevelOne (text input)
 - Broadcast SSID: Enabled Disabled
 - Wireless Separation: Enabled Disabled
 - WMM Support: Enabled Disabled
 - Max. Station Num: 32 (0-32) (text input)
- Security Settings**
 - Network Authentication: Open System (dropdown menu)
 - Data Encryption: Open System (dropdown menu)
 - Key Type: Shared Key (dropdown menu)
 - Default Tx Key: Legacy 802.1x (dropdown menu)
 - WEP Passphrase: (text input)

CPE Mode

1. Choose **Wireless > Basic Settings** for the wireless basic settings.
 In Wireless mode, choose “Wireless Client” to operate in Client mode.
 Click **Apply**.

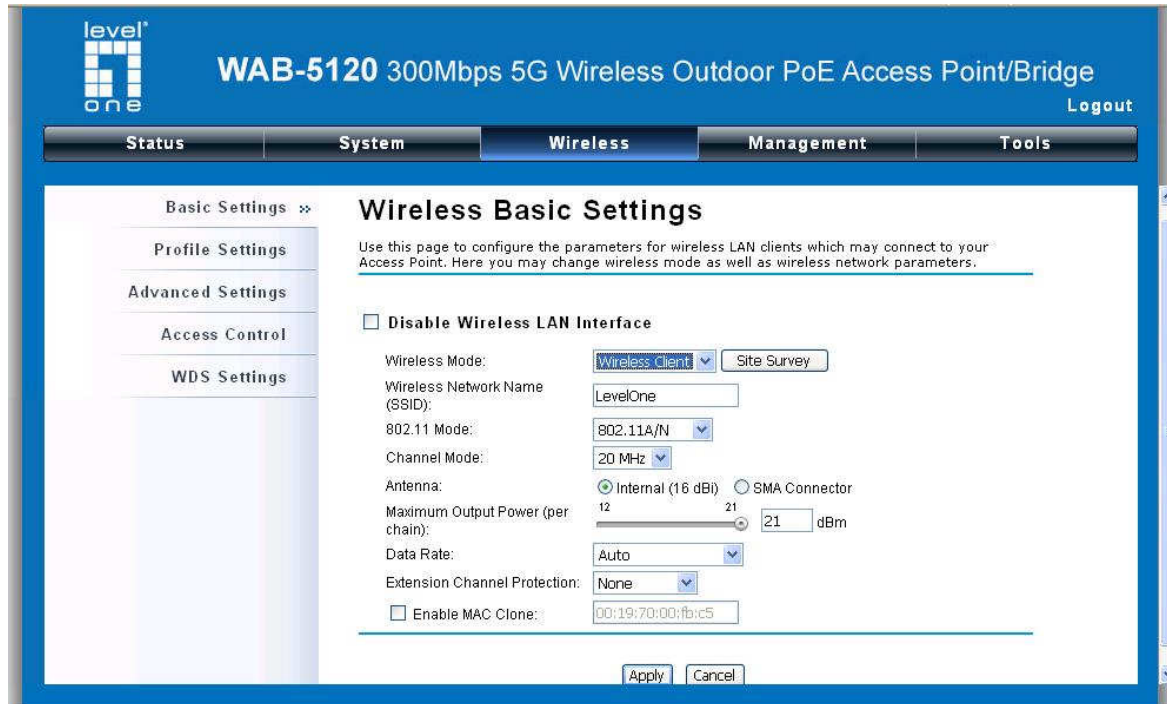

2. Click the “**Site Survey**” button beside **Wireless Mode**. It will scan all the available access points within coverage. Select the one you prefer to connect to, and click **Selected** to establish the connection. You can also click **Scan** to re-scan the available access points.

Wireless Site Survey

This page provides tool to scan the wireless network. If any Access Point or IBSS is found, you could choose to connect it manually when client mode is enabled.

Select	SSID	Frequency/Channel	MAC Address	Wireless Mode	Signal Strength	Security
<input checked="" type="radio"/>	LevelOne	5745MHz(149)	00:11:6B:00:fc:58	802.11A/N	-6	NONE
<input type="radio"/>	Apple Network 873e69	5745MHz(149)	10:9a:dd:87:3e:6a	802.11A/N	-85	WPA2

Selected **Scan**

3. If the AP you connect to needs authentication or password, click **Profile Settings** in the left column, fill out the corresponding items, and click **Apply** for data encryption.

The screenshot shows the web interface for the LevelOne WAB-5120 300Mbps 5G Wireless Outdoor PoE Access Point/Bridge. The interface is in the 'Wireless' tab, and the 'Station Profile Settings' page is active. The left sidebar contains a navigation menu with 'Profile Settings' selected. The main content area is divided into two sections: 'Basic Settings' and 'Security Settings'. In the 'Basic Settings' section, the 'Profile Name' is set to 'Profile1', the 'Wireless Network Name (SSID)' is 'LevelOne', and 'WMM Support' is set to 'Enabled'. In the 'Security Settings' section, the 'Network Authentication' dropdown menu is open, showing options: 'Open System', 'Shared Key', 'Legacy 802.1x', 'WPA with Radius', 'WPA2 with Radius', 'WPA-PSK', and 'WPA2-PSK'. The 'Open System' option is currently selected. Below the dropdown menu is a 'Generate Keys' button. There are also input fields for 'Data Encryption', 'Key Type', 'Default Tx Key', 'WEP Passphrase', and three 'Encryption Key' fields (1, 2, and 3).

Congratulations!

The AP – CPE connection is now successfully configured.

Deutsch

Installation der Hardware

1. Lösen Sie die Schrauben mit einen Schraubendreher. Entfernen Sie das Gehäuse mit einem kräftigen Ruck.



2. Stecken Sie ein Cat.5/5e/6 Kabel in den RJ45 LAN1-Port. Verwenden Sie NICHT den RJ45 LAN2-Port.



3. Stellen Sie die Stromversorgung an, indem Sie die schwarze PWR-Taste neben dem LAN1-Ethernet-Port drücken.



4. Befestigen Sie das Gehäuse mit der mitgelieferten Schraube auf der Halterung.



5. Stecken Sie das Stromkabel in den DC-Port des PoE-Injektors.



6. Verbinden Sie das andere Ende des Cat.5/5e/6 Kabel mit dem PoE-Port des PoE-Injektors. Die Installation ist nun beendet und sollte dem folgenden Bild entsprechen.



Konfiguration

Prüfen Sie Ihre Netzwerk-Einstellungen zum Login Web UI.


Bitte stellen Sie sicher, dass Ihr PC eine statische IP-Adresse automatisch empfangen kann, so dass der WAB-5120 mit Ihrem PC während der Konfiguration kommunizieren kann.

Wählen Sie **“Control Panel”** > **“Network Connections”**.

Rechter Mausklick auf **“Local Area Connection”** und wählen Sie **“Properties”**.

Wählen Sie **“TCP/IP protocol”** für Ihre Netzwerk-Karte.

Klicken Sie auf den **“Properties”** Button. Sie sollten dann das folgende Fenster sehen.

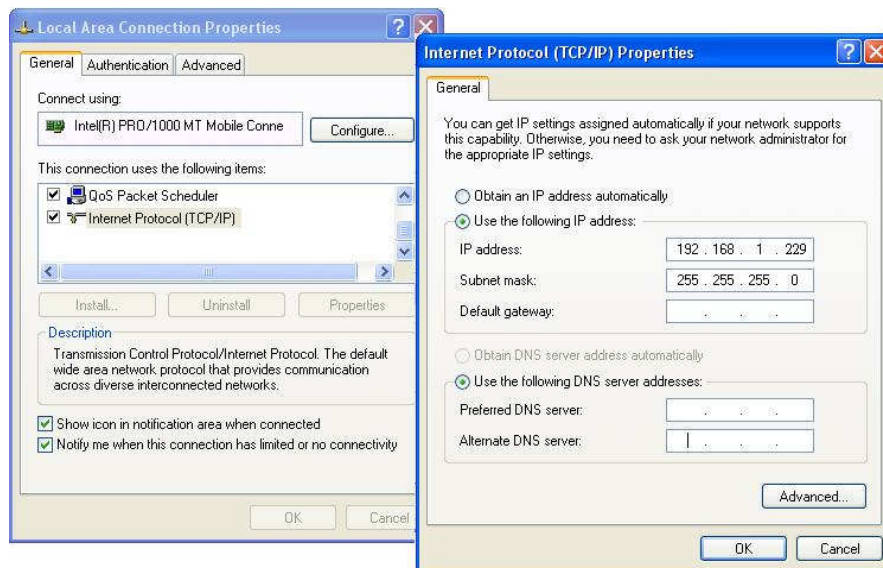

Klicken Sie auf **“Use the following IP address”** und geben Sie die folgende IP-Adresse und Subnetz-Maske an.

IP-Adresse: **192.168.1.229** und Subnetz-Maske: **255.255.255.0**

Klicken Sie auf **“OK”**.

Öffnen Sie Ihren Web-Browser (Internet Explorer wird empfohlen).

Geben Sie ein: **http://192.168.1.1**



Sie werden die WAB-5120 Login-Seite wie folgt sehen.

Nutzen den folgenden Username und Passwort, um sich anzumelden.

Username: **admin** und Passwort: **admin**




Name


Password

AP Modus

1. Wählen Sie **“Wireless > Basic Settings”** zur Grund-Einstellung der Wireless Verbindung. Klicken Sie auf **“Apply”**.

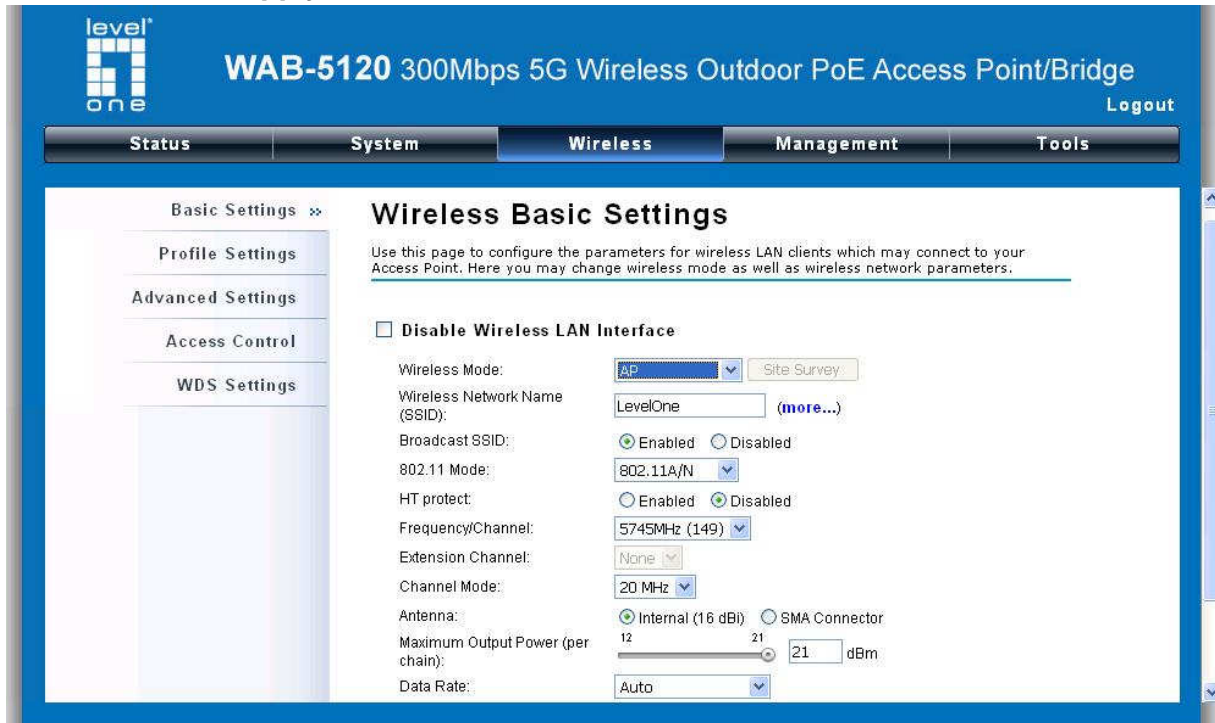


- Sofern Sicherheitseinstellungen erforderlich sind, öffnen Sie bitte **“Wireless > Profile Setting”** und geben **“VAP Profile 1 Settings”** wie folgt ein. Wählen Sie **“Network Authentication”** um die Sicherheitseinstellungen zu ändern. Klicken Sie auf **“Apply”**.

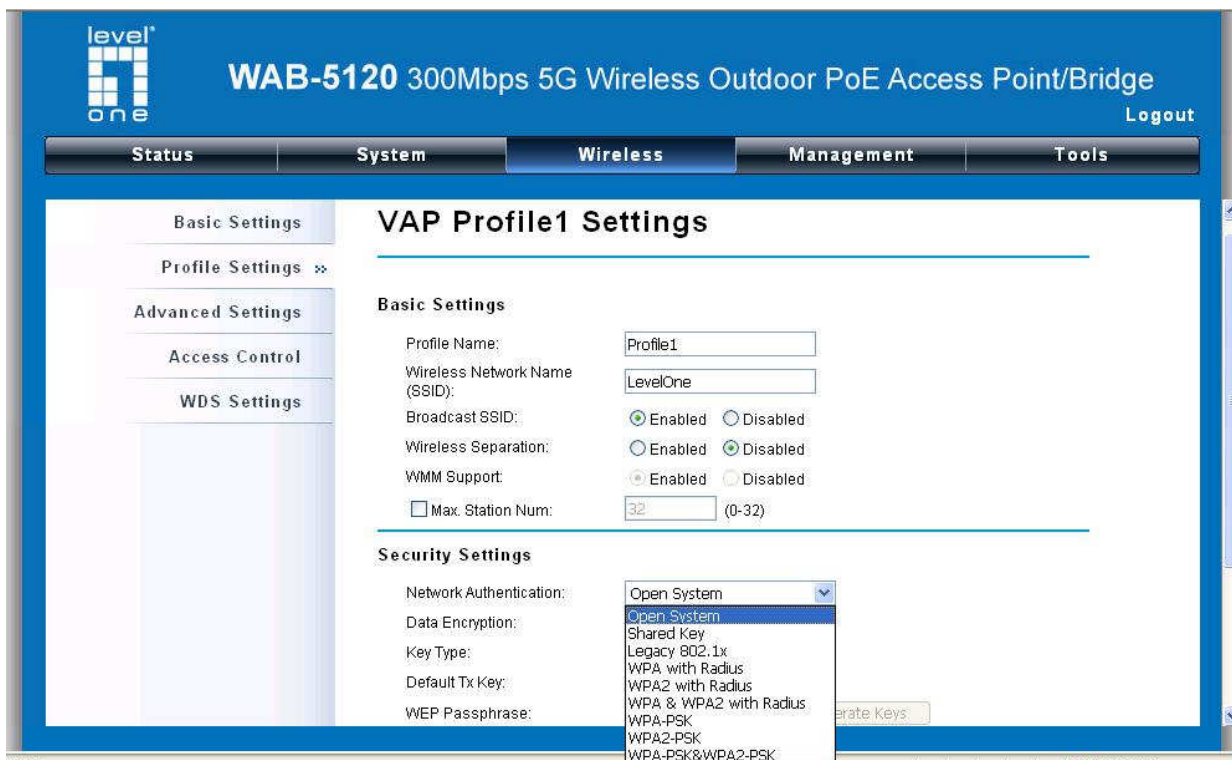

CPE Modus

1. Wählen Sie **“Wireless > Basic Settings”** zur Grund-Einstellung der Wireless Verbindung. Im Wireless Modus, wählen Sie **“Wireless Client”** um im Client-Modus zu arbeiten. Klicken Sie auf **“Apply”**.

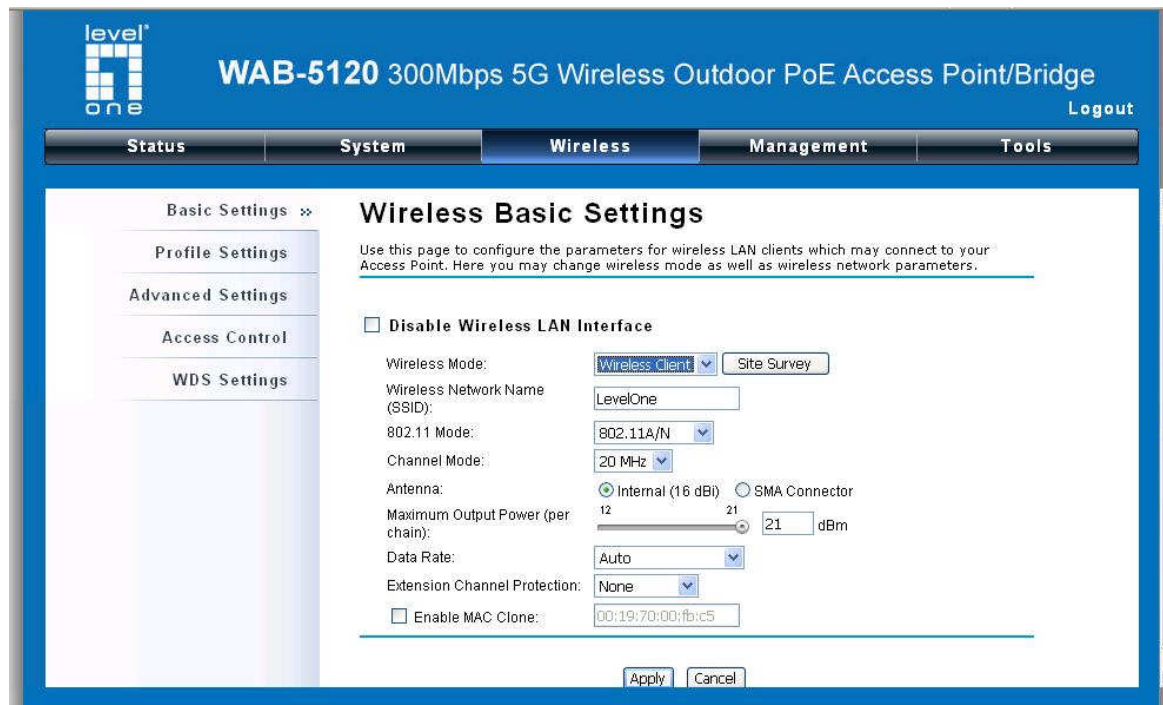


2. Klicken Sie auf den **“Site Survey”** Button neben **“Wireless Mode”**. Es wird nach allen verfügbaren Access Points innerhalb der Reichweite gesucht. Wählen Sie den von Ihnen gewünschten AP aus und klicken Sie auf **“Selected”**, um die Verbindung herzustellen. Sie können auch auf **“Scan”** klicken, um eine erneute Suche nach verfügbaren Access Points durchzuführen.

Wireless Site Survey

This page provides tool to scan the wireless network. If any Access Point or IBSS is found, you could choose to connect it manually when client mode is enabled.

Select	SSID	Frequency/Channel	MAC Address	Wireless Mode	Signal Strength	Security
<input checked="" type="radio"/>	LevelOne	5745MHz(149)	00:11:6B:00:fc:58	802.11A/N	-6	NONE
<input type="radio"/>	Apple Network 873e69	5745MHz(149)	10:9a:dd:87:3e:6a	802.11A/N	-85	WPA2

3. Sollte der verbundene AP eine Authentifizierung oder Passwort benötigen, klicken Sie auf **“Profile Settings”** in der rechten Spalte, geben die notwendigen Daten ein und klicken auf **“Apply”** zur Datenverschlüsselung.

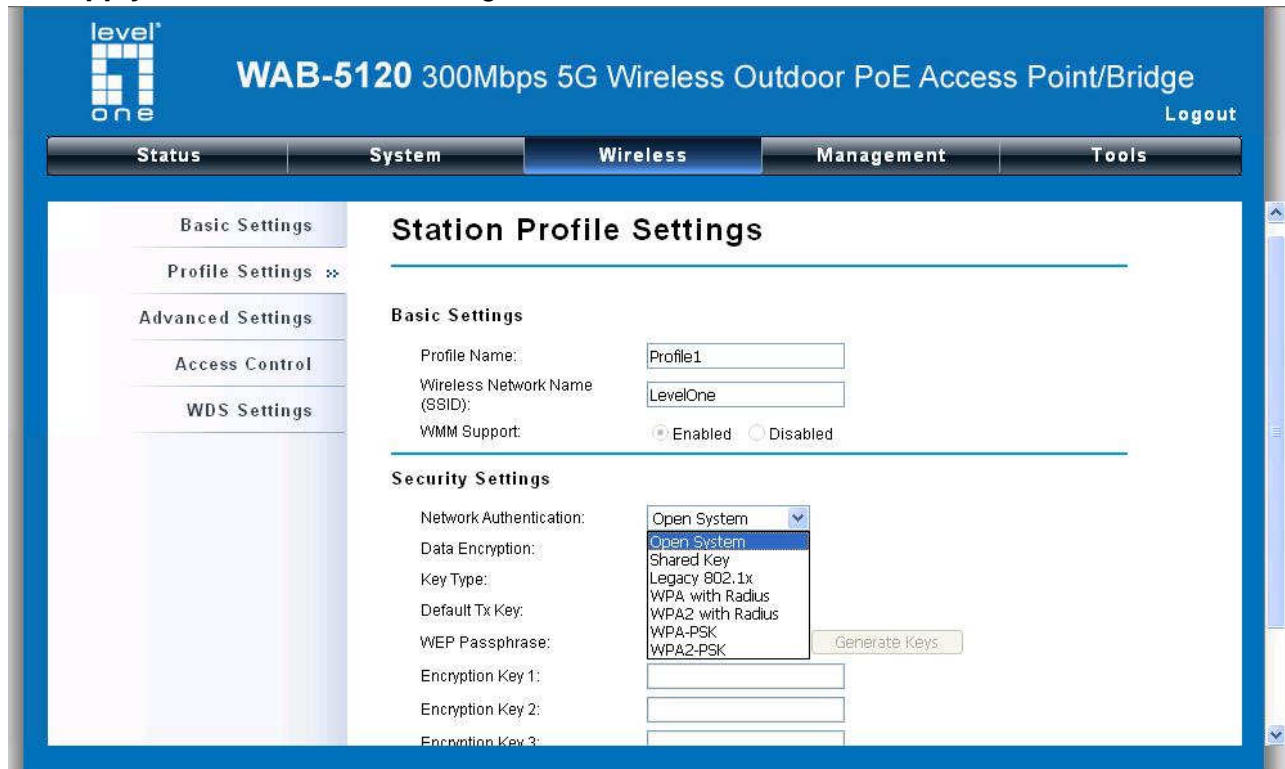

Glückwunsch!

Die AP – CPE Verbindung wurde erfolgreich konfiguriert.